

Belgik (5000)




Cubing/pallet: 100 lin. ft (30.6 lin. m)
Units: 1.2 units/lin. ft (3.9 units/lin. m)
Weight/pallet: 2460 lb (1116 kg)
Texture: Split face and Aged

120 units per pallet
 6 rows of 20 units per pallet

Height in (mm)	Width in (mm)	Length in (mm)
7.5 (190)	3.94 (100)	9.84 (250)

INSTALLATION GUIDE

- The Belgik curbstone should always be installed on the same compacted foundation as a the paver application.
- The compacted surface behind the Belgik curbstone should be 1-1/2 times the thickness of the excavation.
- Install your Belgik along the driveway and pour some concrete (45° angle) behind the curbstone to obtain an "L" shape.
- Install your sand on your driveway like you would normally do in the installation of pavers.
- Backfill the Belgik to add the final touch with your choice of earth, top soil, mulch or grass.

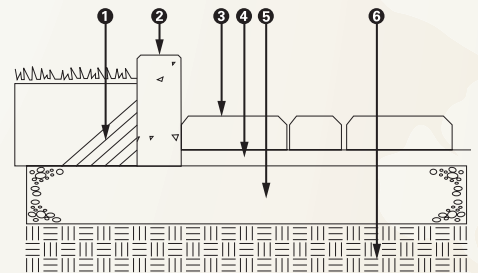

- Poured concrete
- Belgik curbstone
- Paving stone
- Bedding sand
- Compacted foundation
- Compacted subgrade



sandlewood
500001



tan
500002



earth brown
500006



shale grey
500008



rusty grey
500009



brick red
500012



limestone
500014



mojave beige
500016



champlain grey
500021

